


84-78 Autotrak

84-78 Autotrak enables Autojig system users to maintain full control over template cost and delivery time with easy on-site manufacturing of stitching templates. The system produces robust, accurate stitching templates (jigs) of proven durability for small or large scale production of precision-made garment components ranging from pocket flaps to jacket foreparts.



Benefits of Autotrak

- robustly constructed lightweight aluminium alloy router head moves in the "X" and "Y" directions on hardened steel shafts fitted with linear recirculating ball bushings, giving ultra-smooth movement ideal for machining the template
- bushings are fitted with lip seals to exclude dust, for durability and easy maintenance router speed is variable to ensure optimal cutting of different materials
- at 1.7 kWh, the router unit is more powerful than previous models
- depth of cut is adjustable and can be pre-set to 3 positions for easier working
- cutter is fully guarded and dust is continuously extracted
- cutting tools and consumable items can be obtained from local stockists, if necessary
- stitching templates may be either of the proven AMF Reece construction, using phenolic resin sheet material and conventional hinges or, for short production runs, the template may be cut in a single operation from pre-manufactured plastic-hinged Autotrak 'blanks'.

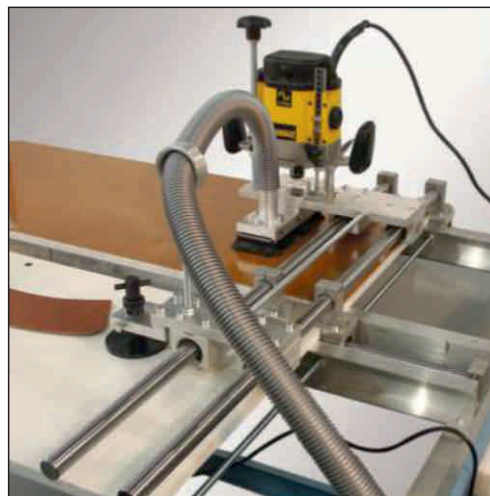

Available Models

84-78 without tools
No jig material is supplied with this version. You can contact the spare parts department to procure materials that are used in making of jigs.

84-78 with tools
Certain quantities of tufnol, sheet aluminium, green base, and hinges are included with the machine allowing the user to start making templates immediately. Additionally, the machine is supplied with small tools such as a drill required to assemble jigs.



Technical Specifications

	84-72M	84-72U
Sewing Head	Sunstar/Juki	Sunstar/Juki
Motor	EFKA Modular DC Motor with solid state needle positioning	
Needle Positioner	Yes	
Stitch Type	High speed single needle lockstitch	
Speed	3600	2600
Cloth Trimming	Yes	
Air Flotation	No	Yes
Seam Allowance		
Standard	4.8 mm	
Option Min.	3.2 mm	
Option Max.	6.4 mm	
Stitching Templates		
Maximum Length	60 cm	140 cm
Min Concave Radius		
Standard Drive Wheel	10 cm	
Small Drive Wheel	5 cm	
Recommended Needle	134K	
Recommended Thread	Core spun polyester/cotton	
Electrical Supply	220-240 50/60 Hz Single phase	
Air Requirements	5.7 bar (80 psi)	
Dimensions		
Length	1300 mm	3050 mm
Width	700 mm	1850 mm
Table Height	930 mm	920 mm
Weight	140 kg	225 kg
Shipping Dimensions		
Length	1510 mm	1480 mm
Width	970 mm	970 mm
Height	1450 mm	1360 mm
Weight	254 kg	396 kg

Accuracy of illustration and description of equipment shown herein apply to products as manufactured at time of publication.



Distributor



Automatic Template Stitching System

Consistent Quality Enhanced Productivity

The AMF Reece Autojig template stitching system, pioneered in the 1960's, is now offered in comprehensive range of Autojig machines. The autojig system was specially designed for automatic assembly of garment components that are always sewn with high and consistent quality. Either double or single jigs with or without fullness can be used depending the model and application.



AMF REECE

Better Ideas, Better Made

Advantages of Using Autojig Templates Stitching System

Consistent Quality & Unmatched Flexibility - every component is correct in size and shape every time, in every fabric, with every operator. Component size, shape or new style can be changed in a few seconds by an operator, without any assistance. Also fabric changes are of no consequences since the feed mechanism drives the jig template and not the fabric.

High flexibility is also ensured in **small-productions** when sewing in sequence; for example one left forepart, one right forepart, one collar, two pocket flaps and two epaulettes.

Each assembled component has **precisely the correct amount of fullness** that is required. For example an operator with limited sewing experiences produce perfectly balanced left and right forepart of jacket with correct amount of fullness and perfect lapel points, which is the major contribution to the quality and appearance of the finished garment.






Simple Operation by Unskilled Operator - very limited sewing skills are required, simply the ability to maintain a steady routine in loading and unloading the stitching templates. New (unskilled) operators produce perfect components from the outset and achieve full productivity within only a few hours.

Enhanced productivity is achieved because one jig template can be loaded while a second template is being sewn so called "needle time" comfortably exceeds 80%.


Typical Production Rate per 8 Hour Day

Topcoats			84-72M	84-72U
1 Raincoat forepart	P	●		260-300
2 Yoke or gun patch			1000-1200	1000-1200
3 Collar		●	1100-1300	1100-1300
4 Epaulette			2300-2500	2300-2500
Menswear				
5 Jacket forepart (SB)	P	●		550-600
6 Jacket forepart (DB)	P	●		420-480
7 Vest Front		●		560-620
8 Pocket flap*		●	2000-2400	2000-2400
9 Waistband extension			1400-1500	1400-1500
Ladieswear				
10 Jacket forepart	P	●		550-600
11 Jacket collar		●	1100-1300	1100-1300
12 Pocket flap*		●	2000-2400	2000-2400
Uniforms/Workwear				
13 Jacket forepart	P	●	420-480	420-480
14 Pocket flap*			2000-2400	2000-2400
15 Van Dyke flap*		○	1900-2300	1900-2300
16 Epaulette			1150-1250	1150-1250
Shirts/Blouses				
17 Pointed collar			1000-1200	1000-1200
18 Rounded collar			1500-1700	1500-1700
19 Attach collar band			1600-2000	1600-2000
20 Cuff*			2400-2800	2400-2800
21 Pocket flap*			2400-2800	2400-2800
22 Epaulette			1150-1250	1150-1250

● fullness option ○ Special small drive wheel recommended * Double jig optional P Pairs

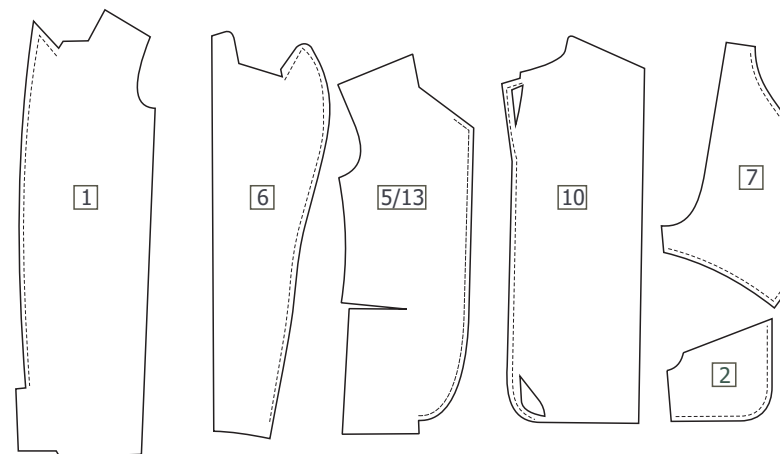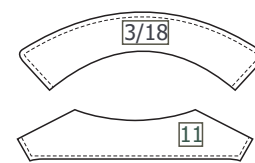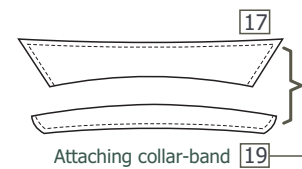

Stitching Jig Specifications

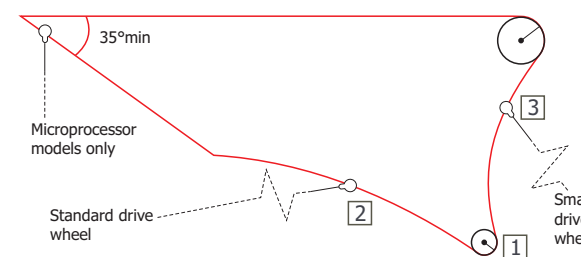

Seam Allowance	mm	inch
- standard	4,8	3/16
- min-max	3,2 - 6,4	1/8 - 1/4
Extra fabric required, in addition to seam allowance:	8	5/16
Minimum Turn Radius at corners (except pointed corners on machines with microprocessor control)	3	1/8 [1]
Minimum Concave Profile Radius		
- standard	100	4 [2]
- with small drive wheel*	50	2 [3]
* then maximum component length becomes	250-300	10-12

84-72M For Assembling Medium Size Components

This model can be used for components up to 60 cm in length, including acutely pointed shapes such as two piece shirt collars.

Advanced Microprocessor controls all of the sewing functions including dense stitching at the beginning and end of the seam, automatic thread trimming, start and stopping of cloth trimming, up to 6 different operation modes at the corners, turn mechanism to rotate the template about the stationary needle at the corner, automatic template ejection at the end of the cycle, batch counter to monitor the productivity, self diagnostic testing facility.

84-72U For Assembling Large/Small Components

These models are upgraded version of 84-72M machines with further unique features to facilitate the handling of very large stitching templates up to 140-150 cm in length.

The model are intended primarily for applications such as attaching the facing to the forepart of jackets and top-coats which are the most critical operations in the manufacture of tailored outerwear. These model can also assemble small components such as pocket flaps and tabs.

Additional Machine Features

Large Worktable Extensions and ergonomic template loading station helps to accommodate the large templates such as jacket and raincoat foreparts.

Air Flotation System supports large stitching templates on a cushion of air. This system can be turned off when small components are being sewn.

Template Alignment Feature preserves the correct orientation of large templates during stitching to provide a more smoothly trimmed cloth edge.

Floor Plans

